





Accessories for 2.809.0010

Below, the accessories are grouped into Scope of delivery and Optional accessories.
Please keep this printout at hand for ordering replacement material.
These lists may be subject to change.

Scope of delivery 2.809.0010

Qty.	Order no.	Description	
1 pcs	1.809.0010	809 Titrande High-end titrator for up to four 800 Dosino dispensing systems. Dynamic (DET) and monotonic (MET) titration, endpoint titration (SET), measurements with ion-selective electrodes (MEAS CONC), dosing functions with monitoring (DOS), liquid handling. With four MSB connections, one galvanically separate measuring interface, USB connection.	
1 pcs	6.0262.100	Ecotrode Plus Combined pH electrode for aqueous acid/base titration. The fixed ground-joint diaphragm is insensitive to contamination. Reference electrolyte: c(KCl) = 3 mol/L, storage in storage solution.	
2 pcs	6.2043.005	Holding clip for bottles Holding spring for reagent bottles in exchange units.	
1 pcs	6.2103.130	Adapter red 2 mm plug / 4 mm socket For connecting plug B (4 mm) to 2 mm socket.	





1 pcs **6.2103.140** **Adapter black 2 mm plug / B socket 4 mm**
For connecting plug B (4 mm) to 2 mm socket.



1 pcs **6.2104.020** **Electrode cable / 1 m / F**
For connecting electrodes with Metrohm plug-in head G to Metrohm instruments (socket F).



Optional accessories

Order no.	Description	
2.800.0010	800 Dosino	
	Drive with write/read hardware for intelligent Dosing Units. With fixed cable (length 150 cm).	
2.801.0040	801 Stirrer with stand	
	Magnetic stirrer including base plate, support rod and electrode holder for supplementing the Titrino plus, Dosimat plus, Titrandos, Sample Processors, 805 Dosimat and 780/781 pH meters as well as the 856 and 867 measuring modules. With permanently attached cable for MSB (Metrohm Serial Bus).	
2.802.0040	802 Stirrer (propeller stirrer) for 804 Ti Stand	
	Rod stirrer with 6.1909.010 Propeller stirrer.	
2.804.0040	804 Ti Stand with stand	
	Titration stand and controller for 802 Rod Stirrer. The 804 Ti Stand together with the optional 802 Rod Stirrer provides an alternative to the magnetic stirrer. Ti Stand with base plate, support rod and electrode holder.	


2.805.0010 805 Dosimat

Dosing device for the Titrandos and Sample Processors with read/write hardware for intelligent Exchange Units. With permanently attached cable. Without Exchange Unit.




6.2001.090 Base plate on both sides

Double stand for attaching 2 x 801, 803, 804 to a Titrandos

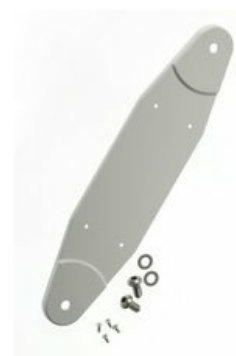

6.2061.010 Bottle holder for Dosinos

Bottle holder for up to two Dosinos, mounted on 1 L reagent bottles.



6.2104.030 Electrode Cable 2 m / F

For connecting electrodes with Metrohm plug-in head G to Metrohm instruments (socket F).



6.2104.140 Electrode cable / 1 m / 2 x 2 mm

For connecting temperature sensors with Metrohm plug-in head G with 780, 781, 826, 827 pH/Ion meters and all Titrandos



6.2104.150 Electrode cable 2 m, 2 x 2 mm

For connecting temperature sensors with Metrohm plug-in head G with 780, 781, 826, 827 pH/Ion meters and all Titrandos



6.2106.020 Strand / 1 m / 2 x B

Electrode cable with 2 x plug B (4 mm) for connecting electrodes with plug-in head B



6.2106.060 Strand / 2 m / 2 x B

Electrode cable with 2 x plug B (4 mm) for connecting electrodes with plug-in head B



6.2125.010 RS-232 cable 3 m, 25-pin – 9-pin

Connecting RS-232 interface to IBM PC AT or compatible computer. Adapter 25-pin to 9-pin



6.2125.020 RS-232 cable 3 m, 25-pin – 25-pin

Connecting Metrohm RS-232 interface with Seiko printer DPU-41X, AND or Mettler balances (option 011, 012). For 691, 692, 713 pH Meters, Titrinos, or 737 KF Coulometer. RS-232 extension cable (1:1) with special EMC shielding.



6.2134.040 RS-232 DB9 - IBM-PC(DB9) connecting cable

For the Metrohm RS-232 interface - PC connection. For Titrinos, Titrino plus and 756, 831 KF Coulometer, RS-232/USB Box



6.2134.060 Connecting cable RS-232 to Sartorius MP8

Connecting Metrohm RS-232 interface to Sartorius balance. Used with Titrinos, and 756, 831 KF Coulometer, RS-232/USB Box



6.2134.110 **Cable RS-232 DB9 socket f – DB9 plug**

Connecting Metrohm RS-232 interface (DB9) to a Custom DP40 printer. For Titrinos or 756/831 KF Coulometer. RS-232 extension cable (1:1)



6.2134.120 **Cable RS-232 to Mettler AX**

Connecting Metrohm RS-232 interface to Mettler AX



6.2148.010 **Remote Box MSB**

Additional remote interface for the connection of devices that can be controlled via remote lines. With permanently attached cable.



6.2148.020 **RS-232/USB box**

Extends the Titrando, USB Sample Processors, Dosing Interface, Titrosampler by two RS-232 interfaces for connecting e.g. balances, PC, LIMS. Requires 6.2151.030 cable.



6.2151.000 **Cable USB A – mini-DIN 8-pin**

Controller cable



6.2151.030 **Cable USB A - USB B / 0.6 m**

Connecting cable USB A - USB B



6.3026.110 Exchange Unit 1 mL

Exchange Unit with integrated data chip with 1 mL glass cylinder and light protection. PCTFE/PTFE flat stopcock, FEP tubing connection, antidiffusion buret tip and standard amber glass reagent bottle.



6.3026.150 Exchange Unit 5 mL

Exchange Unit with integrated data chip with 5 mL glass cylinder and light protection. PCTFE/PTFE flat stopcock, FEP tubing connection, anti-diffusion buret tip and standard amber glass reagent bottle.



6.3026.210 Exchange Unit 10 mL

Exchange unit with integrated data chip with 10 mL glass cylinder and light protection. PCTFE/PTFE flat stopcock, FEP tubing connection, anti-diffusion buret tip and standard amber glass reagent bottle.



6.3026.220 Exchange Unit 20 mL

Exchange unit with integrated data chip with 20 mL glass cylinder and light protection. PCTFE/PTFE flat stopcock, FEP tubing connection, anti-diffusion buret tip and standard amber glass reagent bottle.



6.3026.250 Exchange unit 50 mL

Exchange unit with integrated data chip with 50 mL glass cylinder and light protection. PCTFE/PTFE flat stopcock, FEP tubing connection, antidiffusion tip and standard amber glass reagent bottle.



6.3032.120 Dosing Unit 2 mL

Dosing unit with integrated data chip with 2 mL glass cylinder and light protection, mountable on reagent bottle with ISO/DIN GL45 glass thread. FEP tubing connection, anti-diffusion buret tip.



6.3032.150 Dosing Unit 5 mL

Dosing unit with integrated data chip with 5 mL glass cylinder and light protection, mountable on reagent bottle with ISO/DIN GL45 thread. FEP tubing connection, anti-diffusion buret tip.



6.3032.210 Dosing Unit 10 mL

Dosing unit with integrated data chip with 10 mL glass cylinder and light protection, mountable on reagent bottle with ISO/DIN GL45 thread. FEP tubing connection, anti-diffusion buret tip.



6.3032.220 Dosing Unit 20 mL

Dosing unit with integrated data chip with 20 mL glass cylinder and light protection, mountable on reagent bottle with ISO/DIN GL45 thread. FEP tubing connection, anti-diffusion buret tip.



6.3032.250 Dosing Unit 50 mL

Dosing unit with integrated data chip with 50 mL glass cylinder and light protection, mountable on reagent bottle with ISO/DIN GL45 thread. FEP tubing connection, anti-diffusion buret tip.



6.5104.030 Differential amplifier plug F / 230 V EU

Differential amplifier with power supply.



6.5104.040 **Differential amplifier with plug F / 115 V US**

Differential amplifier with power supply.

